


# CS 261

## Fall 2021

Mike Lam, Professor

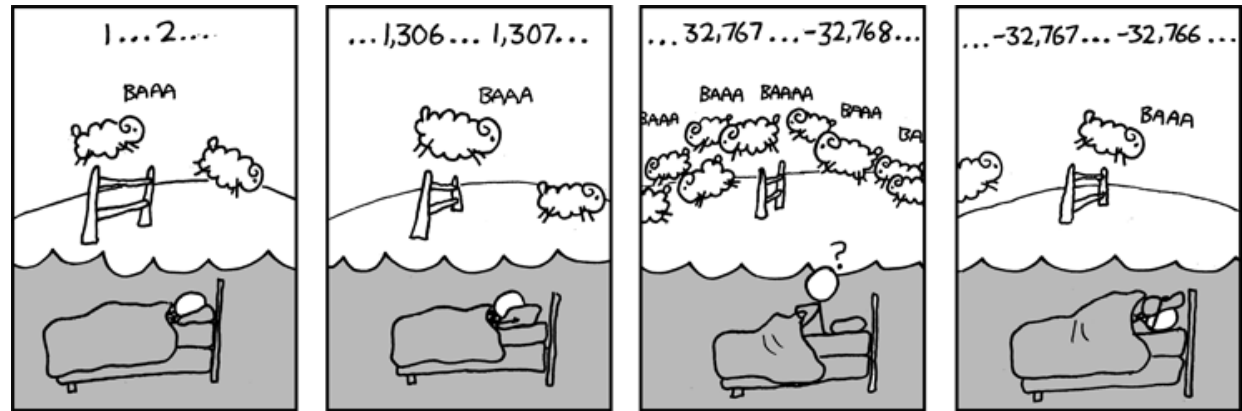

<https://xkcd.com/571/>

## Integer Encodings

# Integers

- Topics
  - C integer data types
  - Unsigned encoding
  - Signed encodings
  - Conversions

# Integer data types in C99

C data type	Minimum	Maximum	
[signed] char	-127	127	1 byte
unsigned char	0	255	
short	-32,767	32,767	2 bytes
unsigned short	0	65,535	
int	-32,767	32,767	2 bytes
unsigned	0	65,535	
long	-2,147,483,647	2,147,483,647	4 bytes
unsigned long	0	4,294,967,295	
int32_t	-2,147,483,648	2,147,483,647	4 bytes
uint32_t	0	4,294,967,295	
int64_t	-9,223,372,036,854,775,808	9,223,372,036,854,775,807	8 bytes
uint64_t	0	18,446,744,073,709,551,615	

**Figure 2.11** Guaranteed ranges for C integral data types. The C standards require that the data types have at least these ranges of values.

# Integer data types on stu

All sizes in bytes; sizes in red are larger than mandated by C99

char	1	int8_t	1
unsigned char	1	uint8_t	1
		bool	1
short	2		
unsigned short	2	int16_t	2
		uint16_t	2
int	4		
unsigned int	4	int32_t	4
		uint32_t	4
long	8		
unsigned long	8	int64_t	8
long long	8	uint64_t	8
unsigned long long	8	size_t	8

# Unsigned integer encoding

- Bit  $i$  represents the value  $2^i$ 
  - Bits typically written from most to least significant (i.e.,  $2^3 \ 2^2 \ 2^1 \ 2^0$ )
  - This is the same encoding we saw last time!
  - No representation of negative numbers

$$1 = 1 = 0 \cdot 2^3 + 0 \cdot 2^2 + 0 \cdot 2^1 + 1 \cdot 2^0 = [0001]$$

$$5 = 4 + 1 = 0 \cdot 2^3 + 1 \cdot 2^2 + 0 \cdot 2^1 + 1 \cdot 2^0 = [0101]$$

$$11 = 8 + 2 + 1 = 1 \cdot 2^3 + 0 \cdot 2^2 + 1 \cdot 2^1 + 1 \cdot 2^0 = [1011]$$

$$15 = 8 + 4 + 2 + 1 = 1 \cdot 2^3 + 1 \cdot 2^2 + 1 \cdot 2^1 + 1 \cdot 2^0 = [1111]$$


# Unsigned integer encoding

- Textbook's notation
  - Each bar represents a bit
  - Add together bars to represent the contributions of each bit value to the overall value

**Figure 2.12**

**Unsigned number  
examples for  $w = 4$ .**

When bit  $i$  in the binary representation has value 1, it contributes  $2^i$  to the value.

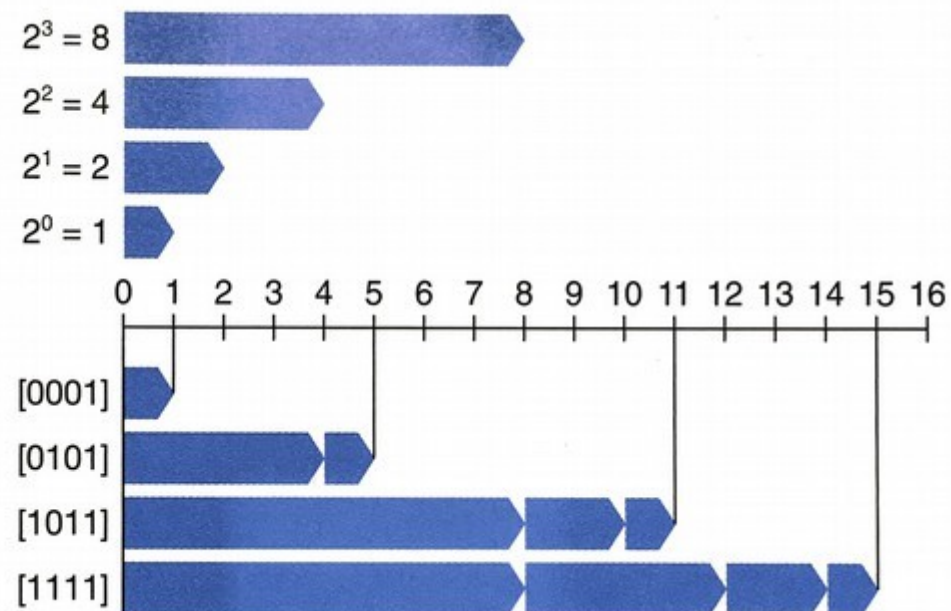

# Signed integer encodings

- Sign magnitude
  - Most natural/intuitive but hardest to implement
- Ones' complement
  - Cleaner arithmetic but less intuitive
- Two's complement
  - Cleanest arithmetic but most complicated
  - Most modern signed integer types use this!

# Sign magnitude

- Sign magnitude

- Interpret most-significant bit as a **sign bit**
- Interpret remaining bits as unsigned number  $x$  (the **magnitude**)
  - If negative, absolute value is  $x$
- To negate: **flip the sign bit**
- Disadvantages:
  - Two zeros:  $-0$  and  $+0$  [1000 and 0000]
  - Less useful for arithmetic because the sign bit has no relationship with the magnitude--cannot use unsigned arithmetic logic!

0 011 = 3  
1 011 = -3  
  
0 111 = 7

0 111 (7)  
1 011 (-3)  
? 010

# Question

- What is the negation of 10110 in sign magnitude?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110

# Question

- Which of the following are negative numbers if interpreted as a sign magnitude integer?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110

# Ones' complement

- **Ones' complement**

- Interpret most-significant bit as a **sign bit**
- Interpret ALL bits as unsigned integer  $x$ 
  - If negative, absolute value is  $[11111...1] - x$
- To negate: **flip all the bits** (binary NOT)
- Disadvantages:
  - Still have two representations of zero (1111 and 0000)
  - Also, less useful for arithmetic than two's complement
    - Must “end-around carry” to preserve results

$$\begin{array}{l} 0 \ 011 = 3 \\ 1 \ 100 = -3 \end{array}$$

$$0 \ 111 = 7$$

$$\begin{array}{r} 1 \\ 0 \ 111 \ (7) \\ 1 \ 100 \ (-3) \\ \hline \end{array}$$

$$\begin{array}{r} 10 \ 011 \\ \quad +1 \text{ (end-around carry)} \\ 0 \ 100 \end{array}$$

# Question

- What is the negation of 10110 in ones' complement?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110


# Question

- Which of the following are negative numbers if interpreted as a ones' complement integer?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110

# Two's complement

- Two's complement
  - Interpret most-significant bit as a **sign bit**
  - Interpret ALL bits as unsigned integer  $x$ 
    - If negative, absolute value is  $2^N - x$  where  $N$  is the number of bits
  - To negate: **subtract value from  $2^N$**  where  $N$  is the number of bits
  - One zero; positive numbers wrap to negative ones halfway through

<u>2's Comp.</u>		<u>Unsigned</u>
-1	1111	15
...		
-7	1001	9
-8	1000	8
7	0111	7
...		
1	0001	1
0	0000	0

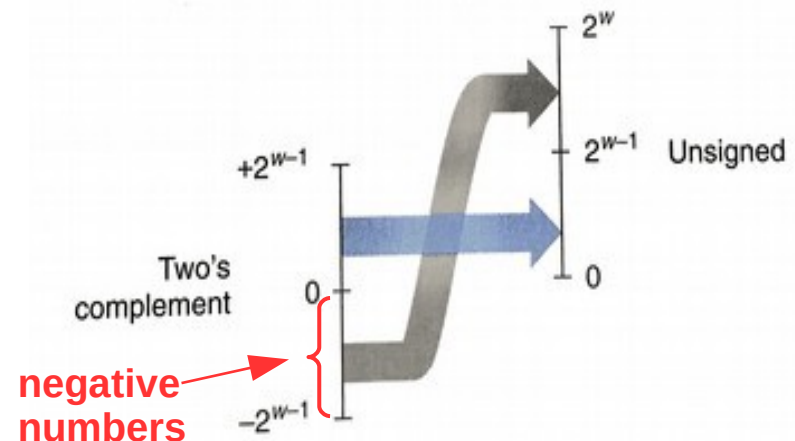

# Two's complement

- **Two's complement** advantage: uses unsigned arithmetic logic
  - (ignore carries out of the sign bit for now)
  - Ex:  $5 - 3 = 5 + (-3) = 0101 + 1101 = 0010$  (2)
  - Ex:  $1 - 3 = 1 + (-3) = 0001 + 1101 = 1110$  (-2)
  - Ex:  $-2 - 3 = (-2) + (-3) = 1110 + 1101 = 1011$  (-5)

$$0011 = 3$$

$$1100$$

$$1101 = -3$$

$$0111 = 7$$

$$0111 \text{ (7)}$$

$$\begin{array}{r} 0111 \text{ (7)} \\ 1101 \text{ (-3)} \\ \hline \end{array}$$

$$0100 \text{ (4)}$$

# Two's complement

- Alternate interpretation: value of most significant bit is negated
  - i.e., start at most negative number and build back up towards zero

Figure 2.12

Unsigned number

examples for  $w = 4$ .

When bit  $i$  in the binary representation has value 1, it contributes  $2^i$  to the value.


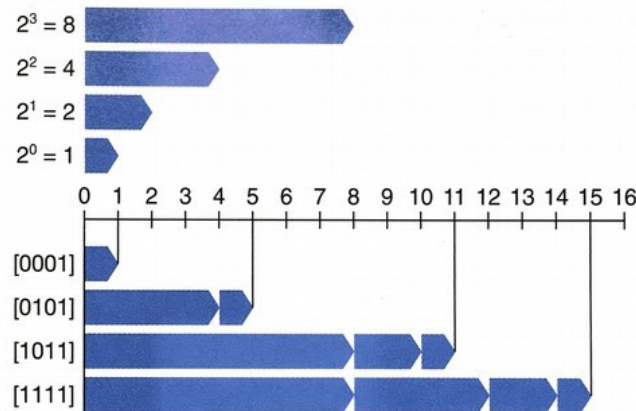


Figure 2.16

Comparing unsigned and two's-complement representations for  $w = 4$ .

The weight of the most significant bit is  $-8$  for two's complement and  $+8$  for unsigned, yielding a net difference of 16.

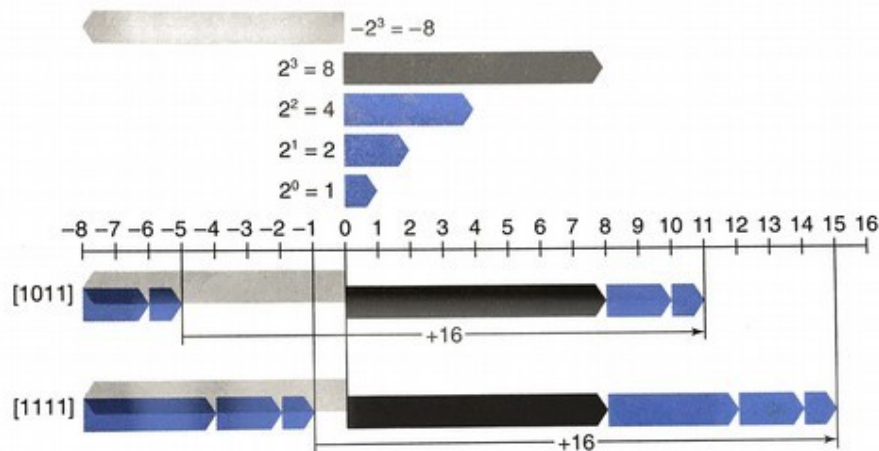

# Two's complement trick

- Alternate way to negate in **two's complement**
  - **Flip the bits** (binary NOT) then **add one**

Ex:  $5 = 0101 \rightarrow (\text{binary NOT}) \rightarrow 1010 \rightarrow (\text{add one}) \rightarrow 1011 = -5 \quad (-8 + 2 + 1)$

**Aside:** Why does this work? The sum of a number  $x$  and  $\sim x$  is all ones (or  $2^N - 1$  where  $N$  is the number of bits), so  $\sim x$  can be expressed as  $2^N - 1 - x$ . Because negating  $x$  in two's complement is equivalent to subtracting  $x$  from  $2^N$ , if we add one to  $\sim x$  the results are equal:

$$\sim x + 1 = (2^N - 1 - x) + 1 = 2^N - x$$

# Question

- What is the negation of 10110 in two's complement?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110

# Question

- Which of the following are negative numbers if interpreted as a two's complement integer?
  - A) 10110
  - B) 10111
  - C) 01001
  - D) 01011
  - E) 01010
  - F) 00110

# Ones' vs. Two's

- **Ones' complement**

- Interpret all bits as unsigned integer  $x$

- Value is  $[11111\dots 1] - x$
- I.e., the complement with respect to **ones**

- **Two's complement**

- Interpret all bits as unsigned integer  $x$

- Value is  $2^N - x$  where  $N$  is the number of bits
- I.e., the complement with respect to a power of **two**

# Caution: language technicalities

- **Ones' complement** and **two's complement** are both an **operation** and an **encoding**
  - E.g., “perform two's complement” vs “the number is stored in two's complement”
- The operation represents the action necessary to **negate** a number in that encoding.
  - E.g., performing two's complement (ones' complement and add one) negates a number in two's complement encoding
- If you have a value in a particular encoding:
  - If the sign bit is not set, it's a positive number
  - If it is set, perform the operation to recover the positive value

**We will avoid using the operation terminology in this course!**

# Integer encodings

- Information = Bits + Context
  - What does “1011” mean? **It depends!**

Unsigned:	11
Sign magnitude:	-3
Ones' complement:	-4
Two's complement:	-5

# Comparison

- We'll see one more signed integer encoding next week: “offset binary” / “biased” / “excess”
  - For now, here's a comparison (for 1-byte integers):

<u>Binary</u> _____	<u>Unsigned</u>	<u>Sign Mag</u>	<u>Ones' C</u>	<u>Two's C</u>	<u>Offset -127</u>
1111 1111	255	-127	-0	-1	128
1111 1110	254	-126	-1	-2	127
...	...	...	...	...	...
1000 0001	129	-1	-126	-127	2
1000 0000	128	-0	-127	-128	1
0111 1111	127	127	127	127	0
0111 1110	126	126	126	126	-1
...	...	...	...	...	...
0000 0001	1	1	1	1	-126
0000 0000	0	0	0	0	-127

# Question

- Which of the following are guaranteed to be “safe” (i.e., the value will always be preserved)?
  - A) Smaller unsigned → larger unsigned
  - B) Smaller two’s comp. → larger two’s comp.
  - C) Larger → smaller (unsigned or two’s comp.)
  - D) Unsigned → two’s comp.
  - E) Two’s comp. → unsigned

# Conversions

- Smaller unsigned → larger unsigned  
– Safe; **zero-extend** to preserve value  
 $0101 \text{ (5)} \rightarrow 0000 \ 0101 \text{ (5)}$
- Smaller two's comp. → larger two's comp.  
– Safe; **sign-extend** to preserve value  
 $\underline{1}101 \text{ (-3)} \rightarrow \underline{1}111 \ 1101 \text{ (-3)}$
- Larger → smaller (unsigned or two's comp.)  
– **Overflow** if new type isn't large enough to fit (truncate)  
 $\begin{array}{l} 0000 \ 0101 \text{ (5)} \rightarrow 0101 \text{ (5)} \\ 0011 \ 0101 \text{ (53)} \rightarrow 0101 \text{ (5)} \end{array}$
- Unsigned → two's comp.  
– **Overflow** if first bit is non-zero (otherwise, no change)  
 $\begin{array}{l} 0101 \text{ (5)} \rightarrow 0101 \text{ (5)} \\ 1101 \text{ (13)} \rightarrow \underline{1}101 \text{ (-3)} \end{array}$
- Two's comp. → unsigned  
– **Overflow** if value is negative (otherwise, no change)  
 $\begin{array}{l} 0101 \text{ (5)} \rightarrow 0101 \text{ (5)} \\ \underline{1}101 \text{ (-2)} \rightarrow 1101 \text{ (13)} \end{array}$