



# Representing Relations

Section 9.3

# Representing Relations Using Matrices

- A relation between finite sets can be represented using a zero-one matrix.
- Suppose  $R$  is a relation from  $A = \{a_1, a_2, \dots, a_m\}$  to  $B = \{b_1, b_2, \dots, b_n\}$ .
- The relation  $R$  is represented by the matrix  $M_R = [m_{ij}]$ , where

$$m_{ij} = \begin{cases} 1 & \text{if } (a_i, b_j) \in R, \\ 0 & \text{if } (a_i, b_j) \notin R. \end{cases}$$

- The matrix representing  $R$  has a 1 as its  $(i,j)$  entry when  $a_i$  is related to  $b_j$  and a 0 if  $a_i$  is not related to  $b_j$ .

## Examples of Representing Relations Using Matrices

**Example 1:** Suppose that  $A = \{1,2,3\}$  and  $B = \{1,2\}$ . Let  $R$  be the relation from  $A$  to  $B$  containing  $(a,b)$  if  $a \in A$ ,  $b \in B$ , and  $a > b$ . What is the matrix representing  $R$ ?

## Examples of Representing Relations Using Matrices

**Example 1:** Suppose that  $A = \{1,2,3\}$  and  $B = \{1,2\}$ . Let  $R$  be the relation from  $A$  to  $B$  containing  $(a,b)$  if  $a \in A$ ,  $b \in B$ , and  $a > b$ . What is the matrix representing  $R$ ?

**Solution:** Because  $R = \{(2,1), (3,1),(3,2)\}$ , the matrix is

$$M_R = \begin{bmatrix} 0 & 0 \\ 1 & 0 \\ 1 & 1 \end{bmatrix}.$$

# Examples of Representing Relations Using Matrices (*cont.*)

**Example 2:** Let  $A = \{a_1, a_2, a_3\}$  and  $B = \{b_1, b_2, b_3, b_4, b_5\}$ . Which ordered pairs are in the relation  $R$  represented by the matrix

$$M_R = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 & 1 \end{bmatrix} ?$$

# Examples of Representing Relations Using Matrices (*cont.*)

**Example 2:** Let  $A = \{a_1, a_2, a_3\}$  and  $B = \{b_1, b_2, b_3, b_4, b_5\}$ . Which ordered pairs are in the relation  $R$  represented by the matrix

$$M_R = \begin{bmatrix} 0 & 1 & 0 & 0 & 0 \\ 1 & 0 & 1 & 1 & 0 \\ 1 & 0 & 1 & 0 & 1 \end{bmatrix} ?$$

**Solution:**

$$R = \{(a_1, b_2), (a_2, b_1), (a_2, b_3), (a_2, b_4), (a_3, b_1), (a_3, b_3), (a_3, b_5)\}.$$

# Matrices of Relations on Sets

- If  $R$  is a reflexive relation, all the elements on the main diagonal of  $M_R$  are equal to 1.

$$\begin{bmatrix} 1 & & & & & \\ & 1 & & & & \\ & & 1 & & & \\ & & & \ddots & & \\ & & & & \ddots & \\ & & & & & 1 & \\ & & & & & & 1 \end{bmatrix}$$

- $R$  is a symmetric relation, if and only if  $m_{ij} = 1$  whenever  $m_{ji} = 1$ .  $R$  is an antisymmetric relation, if and only if  $m_{ij} = 0$  or  $m_{ji} = 0$  when  $i \neq j$ .

$$\begin{bmatrix} & & 1 & & \\ & & & & \\ 1 & & & & \\ & & & & 0 \\ & & 0 & & \end{bmatrix}$$

(a) Symmetric

$$\begin{bmatrix} & & 1 & & \\ & & & 0 & \\ 0 & & & & \\ & & & & 0 \\ & & 0 & & 1 \end{bmatrix}$$

(b) Antisymmetric

# Example of a Relation on a Set

**Example 3:** Suppose that the relation  $R$  on a set is represented by the matrix

$$M_R = \begin{bmatrix} 1 & 1 & 0 \\ 1 & 1 & 1 \\ 0 & 1 & 1 \end{bmatrix}.$$

Is  $R$  reflexive, symmetric, and/or antisymmetric?



# Example of a Relation on a Set

**Example 3:** Suppose that the relation  $R$  on a set is represented by the matrix

$$M_R = \begin{bmatrix} 1 & 1 & 0 \\ 1 & 1 & 1 \\ 0 & 1 & 1 \end{bmatrix}.$$

Is  $R$  reflexive, symmetric, and/or antisymmetric?


**Solution:** Because all the diagonal elements are equal to 1,  $R$  is reflexive. Because  $M_R$  is symmetric,  $R$  is symmetric and not antisymmetric because both  $m_{1,2}$  and  $m_{2,1}$  are 1.

# Representing Relations Using Digraphs

**Definition:** A *directed graph*, or *digraph*, consists of a set  $V$  of *vertices* (or *nodes*) together with a set  $E$  of ordered pairs of elements of  $V$  called *edges* (or *arcs*). The vertex  $a$  is called the *initial vertex* of the edge  $(a,b)$ , and the vertex  $b$  is called the *terminal vertex* of this edge.


- An edge of the form  $(a,a)$  is called a *loop*.

**Example 7:** A drawing of the directed graph with vertices  $a$ ,  $b$ ,  $c$ , and  $d$ , and edges  $(a, b)$ ,  $(a, d)$ ,  $(b, b)$ ,  $(b, d)$ ,  $(c, a)$ ,  $(c, b)$ , and  $(d, b)$  is shown here.

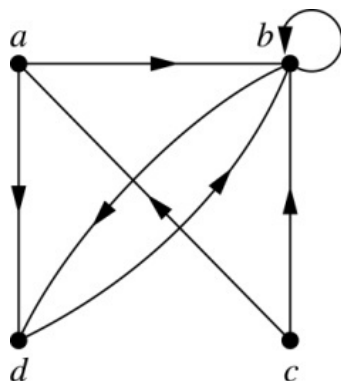


# Examples of Digraphs Representing Relations

**Example 8:** What are the ordered pairs in the relation represented by this directed graph?

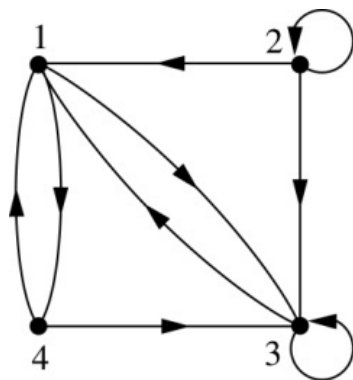

# Examples of Digraphs Representing Relations

**Example 8:** What are the ordered pairs in the relation represented by this directed graph?

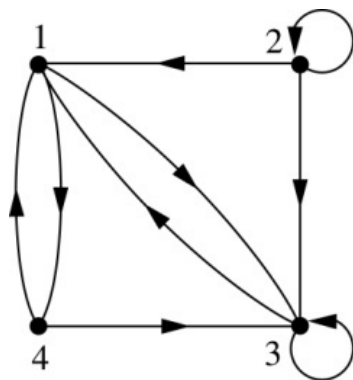


**Solution:** The ordered pairs in the relation are

$(1, 3)$ ,  $(1, 4)$ ,  $(2, 1)$ ,  $(2, 2)$ ,  $(2, 3)$ ,  $(3, 1)$ ,  $(3, 3)$ ,  
 $(4, 1)$ , and  $(4, 3)$

# Determining which Properties a Relation has from its Digraph


- *Reflexivity*: A loop must be present at all vertices in the graph.
- *Symmetry*: If  $(x,y)$  is an edge, then so is  $(y,x)$ .
- *Antisymmetry*: If  $(x,y)$  with  $x \neq y$  is an edge, then  $(y,x)$  is not an edge.
- *Transitivity*: If  $(x,y)$  and  $(y,z)$  are edges, then so is  $(x,z)$ .

## Determining which Properties a Relation has from its Digraph - Example 1




- *Reflexive?*
- *Symmetric?*
- *Antisymmetric?*
- *Transitive?*

# Determining which Properties a Relation has from its Digraph - Example 1



- *Reflexive?* **No**, not every vertex has a loop
- *Symmetric?* **Yes** (trivially), there is no edge from one vertex to another
- *Antisymmetric?* **Yes** (trivially), there is no edge from one vertex to another
- *Transitive?* **Yes**, (trivially) since there is no edge from one vertex to another


## Determining which Properties a Relation has from its Digraph - Example 2



- *Reflexive?*
- *Symmetric?*
- *Antisymmetric?*
- *Transitive?*




## Determining which Properties a Relation has from its Digraph - Example 2




- *Reflexive?* No, there are no loops
- *Symmetric?* No, there is an edge from  $a$  to  $b$ , but not from  $b$  to  $a$
- *Antisymmetric?* No, there is an edge from  $d$  to  $b$  and  $b$  to  $d$
- *Transitive?* No, there are edges from  $a$  to  $c$  and from  $c$  to  $b$ , but there is no edge from  $a$  to  $d$

## Determining which Properties a Relation has from its Digraph - Example 3



- *Reflexive?*
- *Symmetric?*
- *Antisymmetric?*
- *Transitive?*

## Determining which Properties a Relation has from its Digraph - Example 3



- *Reflexive?* No, there are no loops
- *Symmetric?* No, for example, there is no edge from  $c$  to  $a$
- *Antisymmetric?* Yes, whenever there is an edge from one vertex to another, there is not one going back
- *Transitive?* No, there is no edge from  $a$  to  $b$

# Join and Meet of Binary Matrices

$$M_R = \begin{bmatrix} 1 & 0 & 1 \\ 0 & 1 & 0 \end{bmatrix} \quad M_S = \begin{bmatrix} 0 & 1 & 0 \\ 1 & 1 & 0 \end{bmatrix}$$

The **join** of  $M_R$  and  $M_S$ :

$$M_R \vee M_S = \begin{bmatrix} 1 \vee 0 & 0 \vee 1 & 1 \vee 0 \\ 0 \vee 1 & 1 \vee 1 & 0 \vee 0 \end{bmatrix} = \begin{bmatrix} 1 & 1 & 1 \\ 1 & 1 & 0 \end{bmatrix} = M_{R \cup S}$$

The **meet** of  $M_R$  and  $M_S$ :

$$M_R \wedge M_S = \begin{bmatrix} 1 \wedge 0 & 0 \wedge 1 & 1 \wedge 0 \\ 0 \wedge 1 & 1 \wedge 1 & 0 \wedge 0 \end{bmatrix} = \begin{bmatrix} 0 & 0 & 0 \\ 0 & 1 & 0 \end{bmatrix} = M_{R \cap S}$$

# Boolean Product of Binary Matrices

$$M_R = \begin{bmatrix} 1 & 0 & 1 \\ 1 & 1 & 0 \\ 0 & 0 & 0 \end{bmatrix} \quad M_S = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 0 & 1 \\ 1 & 0 & 1 \end{bmatrix}$$

$$M_{S \circ R} = M_R \odot M_S =$$

$$\begin{bmatrix} (1 \wedge 0) \vee (0 \wedge 0) \vee (1 \wedge 1) & (1 \wedge 1) \vee (0 \wedge 0) \vee (1 \wedge 0) & (1 \wedge 0) \vee (0 \wedge 1) \vee (1 \wedge 1) \\ (1 \wedge 0) \vee (1 \wedge 0) \vee (0 \wedge 1) & (1 \wedge 1) \vee (1 \wedge 0) \vee (0 \wedge 0) & (1 \wedge 0) \vee (1 \wedge 1) \vee (0 \wedge 1) \\ (0 \wedge 0) \vee (0 \wedge 0) \vee (0 \wedge 1) & (0 \wedge 1) \vee (0 \wedge 0) \vee (0 \wedge 0) & (0 \wedge 0) \vee (0 \wedge 1) \vee (0 \wedge 1) \end{bmatrix} =$$
$$\begin{bmatrix} 1 & 1 & 1 \\ 0 & 1 & 1 \\ 0 & 0 & 0 \end{bmatrix}$$

# Example

$$M_R = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 1 & 1 \\ 1 & 0 & 0 \end{bmatrix}$$

What is  $M_{R^2}$  ?

# Example

$$M_R = \begin{bmatrix} 0 & 1 & 0 \\ 0 & 1 & 1 \\ 1 & 0 & 0 \end{bmatrix}$$

What is  $M_{R^2}$  ?

$$M_{R^2} = M_{R \circ R} = M_R \odot M_R = \begin{bmatrix} 0 & 1 & 1 \\ 1 & 1 & 1 \\ 0 & 1 & 0 \end{bmatrix}$$