CS 261
Fall 2020

Mike Lam, Professor

```
void foo()        void bar(x)        void baz(x,y)
{                 {                  {
     int a,b;          int c;             int d;
     bar(a)            baz(x,c);          return;
     return;           return;        }
}                 }
```

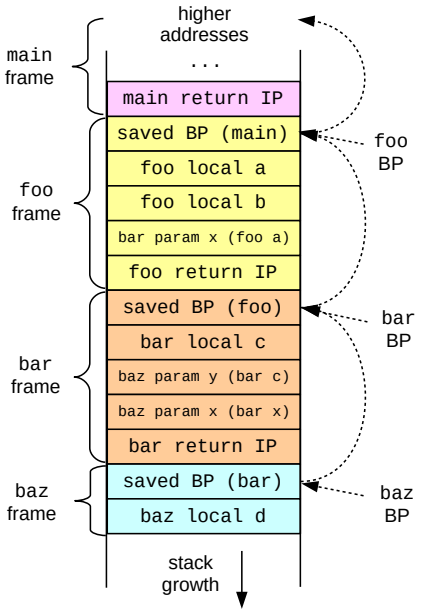

x86-64 Procedures

Topics

- ABIs, the runtime stack, and control transfer
- Data transfer and local storage
- Security issues

Procedure calls

- A procedure is a portion of code packaged for re-use
  - Key abstraction in software development
  - Provide modularity and encapsulation
  - Many alternative names: functions, methods, subroutines
- Well-designed procedures have:
  - Well-documented, typed arguments and return value(s)
  - Clear impact on program state (or no impact)
    - Also known as “side effects”

Problem

- Impossible to implement procedures in assembly with branches or jumps alone
  - Once you've jumped, how do you return?
  - Can hard-code for one call site, but not for 2+
- Need a mechanism for "remembering" where we came from
  - And any machine state important for getting back
  - Don't want to use registers because there are so few
  - Solution: use memory! **(but how and where?)**

ABI

- Application Binary Interface (ABI)
  - Interface between program & system at the binary level
  - Includes rules about how procedure calls are implemented
  - These rules are referred to as calling conventions
  - We will study the standard x86-64 calling conventions
- Calling conventions specify:
  - Control transfer
  - Data transfer
  - Local storage

Runtime stack

- Basic idea: maintain a system stack frame for each procedure call
  - All active procedure have a frame
  - Each frame stores information about a single active call
    - Arguments, local variables, return address
  - GDB's "backtrace" command follows the chain up
  - Recursion just works!

Here function P has called function Q

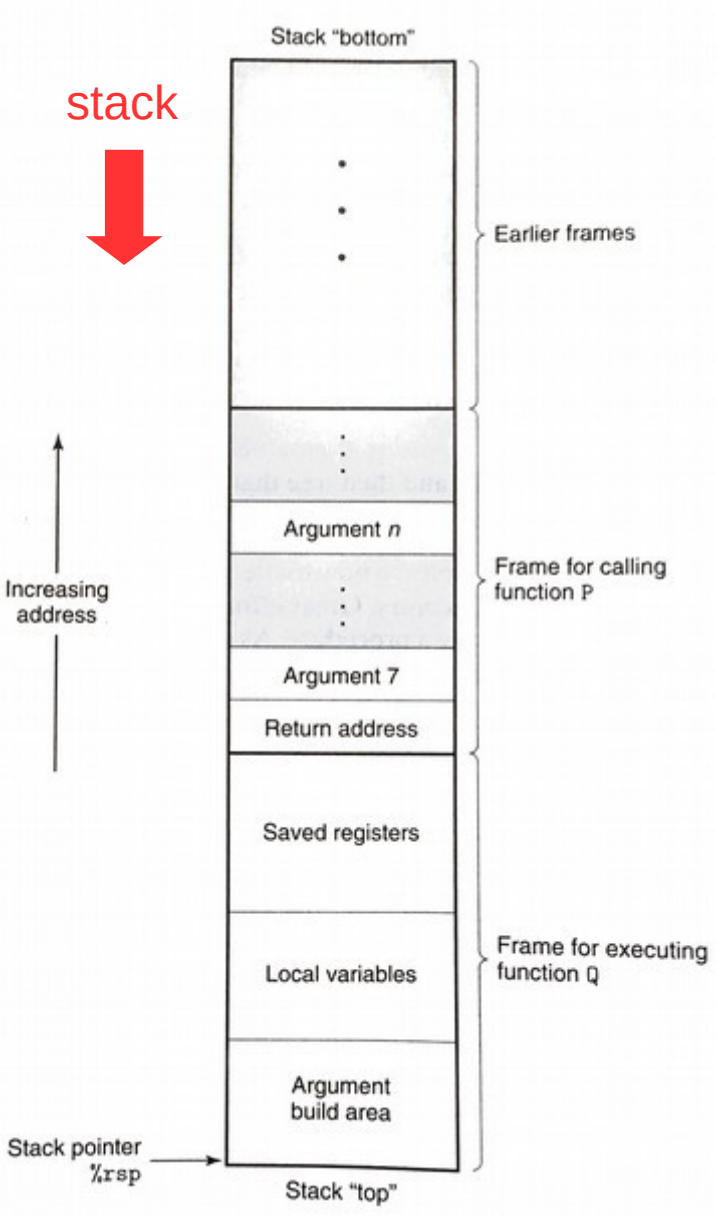

Control transfer

- Use stack to store return addresses
  - Return address: the instruction AFTER the `call`
  - `call` / `callq` pushes 64-bit return address onto stack
  - `ret` / `retq` pops the return address and sets `%rip`

```
400550 <main>:
  ...
  400563  callq 400540 <foo>
  400568  movq 0x8(%rsp), %rdx
  ...
```

```
400550 <foo>:
  400540  xorq %rax, %rax
  ...
  40054d  retq
```

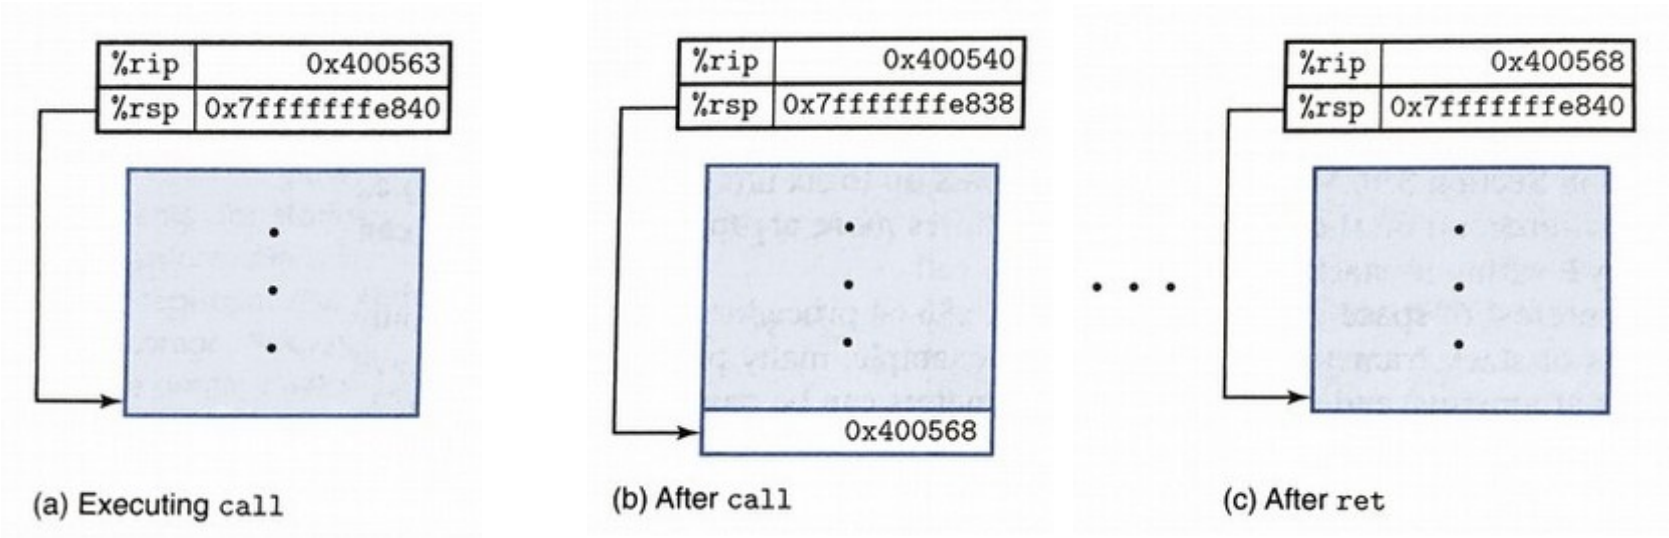

(a) Executing `call` (b) After `call` (c) After `ret`

Data transfer

- In x86-64, up to six integral (integer or pointer) arguments are passed to a procedure via registers:
  - `%rdi, %rsi, %rdx, %rcx, %r8, %r9`
  - Other arguments are passed on the stack (and pushed in reverse order)

- A single return value is passed back via `%rax`
  - Large structs often “returned” using a pointer

Local storage (registers)

- Some registers are designated callee-saved
  - In x86-64: `%rbx, %rbp, %r12, %r13, %r14, %r15`
  - A procedure must save/restore these registers (often using push/pop) if they are used during the procedure
  - When possible, avoid using these registers inside procedures (lower overhead)

- Other registers (except `%rsp`) are caller-saved
  - Caller must save them if they need to be preserved
  - The stack pointer is a special case (used for communication)

Local storage (memory)

- Procedures can allocate space on the stack for local variables
  - Subtract # of bytes needed from `%rsp`
  - Deallocate by restoring old `%rsp` value
- Variable-sized allocations require special handling
  - Use base / frame pointer (`%rbp`) to track "anchor" for current frame
  - Save previous base pointer on stack at beginning of function
  - Section 3.10.5 in textbook

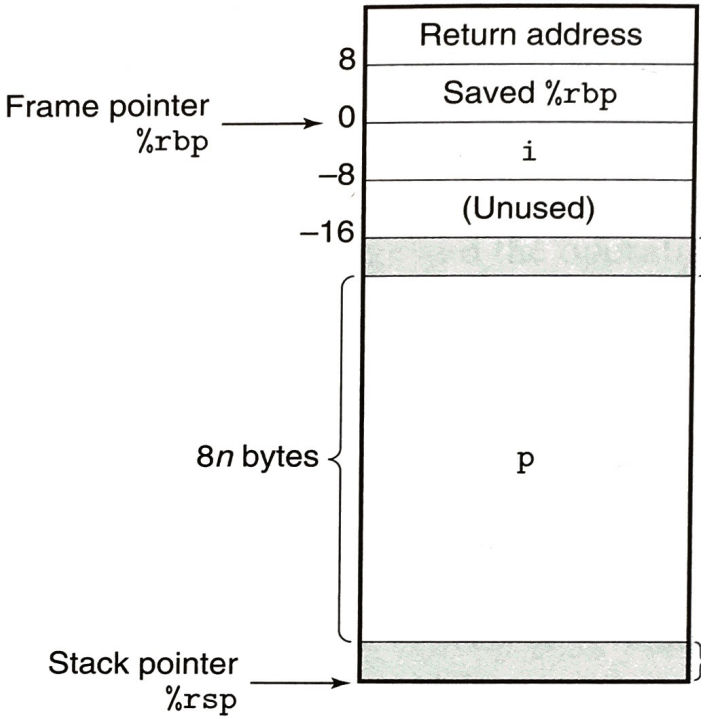

Base pointers

CS 430/432 preview

- Use base pointer (`%rbp`) to track the beginning of current frame
  - Parameters at positive offsets
  - Local values at negative offsets
  - Chain of base pointers up the stack
  - Push/pop BP like return address

CALLER

Pre-call:

```
pushq <param2>
pushq <param1>
callq <func>
```

Post-return:

```
subq $16, %rsp
...
```

CALLEE

Prologue:

```
pushq %rbp
movq %rsp, %rbp
subq $n, %rsp
...
```

Epilogue:

```
movq %rbp, %rsp
popq %rbp
retq
```

```
void foo()
{
    int a,b;
    bar(a)
    return;
}
```

```
void bar(x)
{
    int c;
    baz(x,c);
    return;
}
```

```
void baz(x,y)
{
    int d;
    return;
}
```

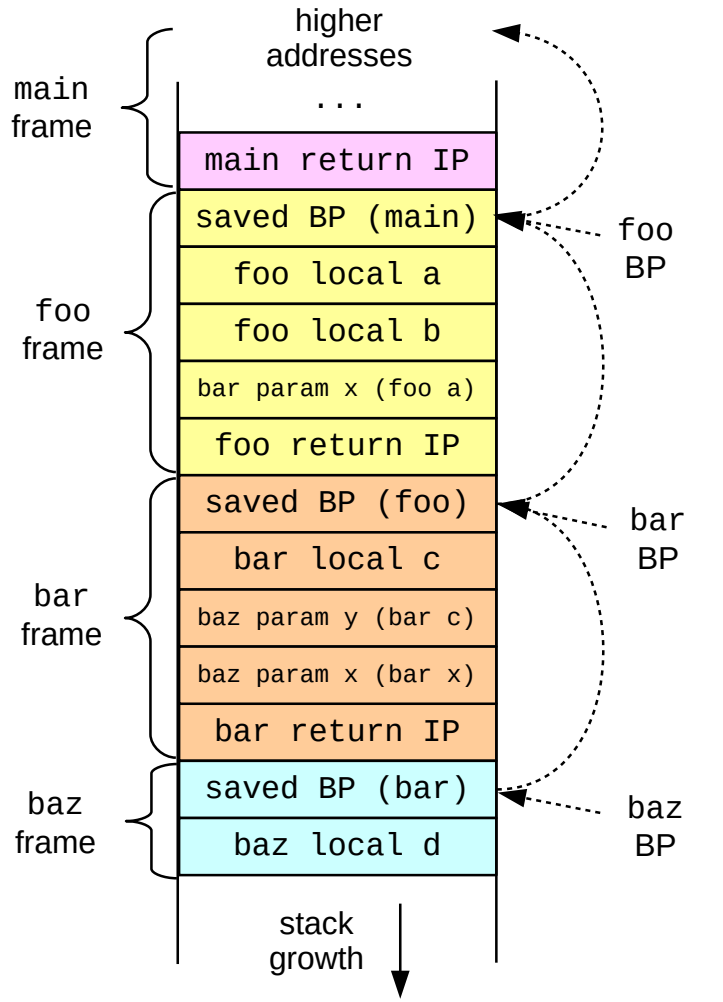

Question

- What is the security problem with the following C function?

```
void echo () {
    char buf[8];
    gets(buf);
    printf(buf);
}
```

  - A) It reads from an unspecified file stream
  - B) It writes to standard output
  - C) It can write to memory in echo's stack frame
  - D) It can write to memory in the caller's stack frame
  - E) It stores a character array on the stack

Buffer overflows

- Major x86-64 security issue
  - C and assembly do not check for out-of-bounds array accesses
  - x86-64 stores return addresses and data on the same stack
  - Out-of-bound writes to local variables may overwrite other stack frames
  - Allows attackers to change control flow just by providing the right "data"
  - Many historical exploits (including Morris worm)

```
void echo ()
{
    // other code
    // omitted

    char buf[8];
    gets(buf);
    printf(buf);
}
```

DO NOT WRITE CODE LIKE THIS!

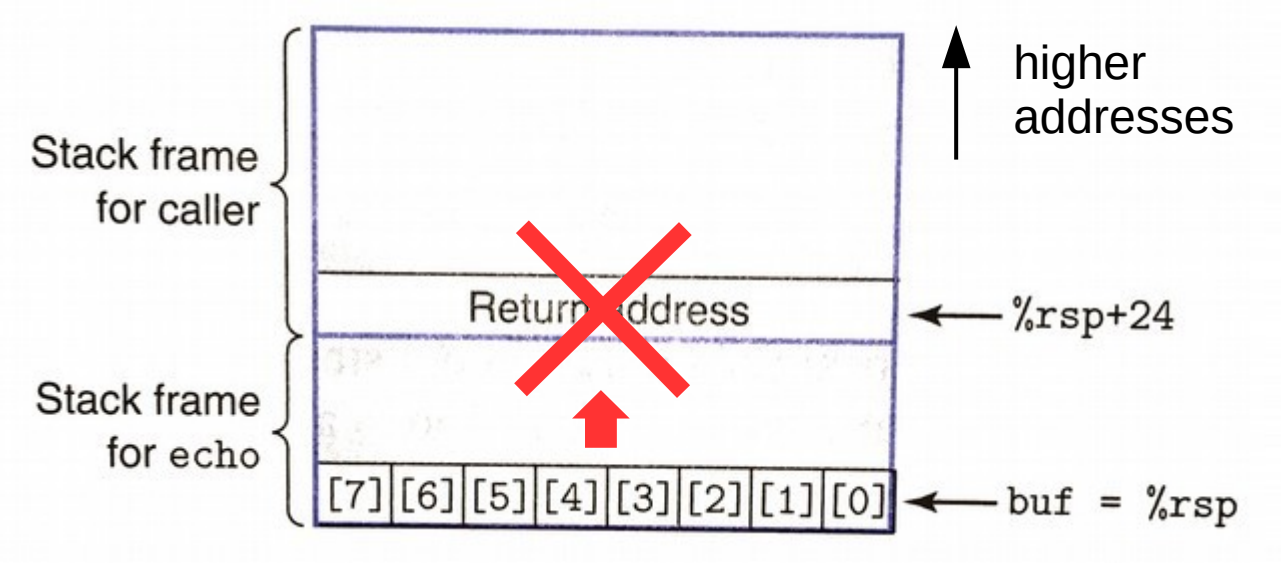

Buffer overflows

- Shellcode (exploit code)
  - Pre-compiled snippets of code that exploit a buffer overflow

```
char shellcode[] =
        "\xeb\x1f\x5e\x89\x76\x08\x31\xc0\x88\x46\x07\x89\x46\x0c\xb0\x0b"
        "\x89\xf3\x8d\x4e\x08\x8d\x56\x0c\xcd\x80\x31\xdb\x89\xd8\x40\xcd"
        "\x80\xe8\xdc\xff\xff\xff/bin/sh";
```

Complication: Must pad the shellcode with address of the buffer (guess and/or use a NOP-sled)

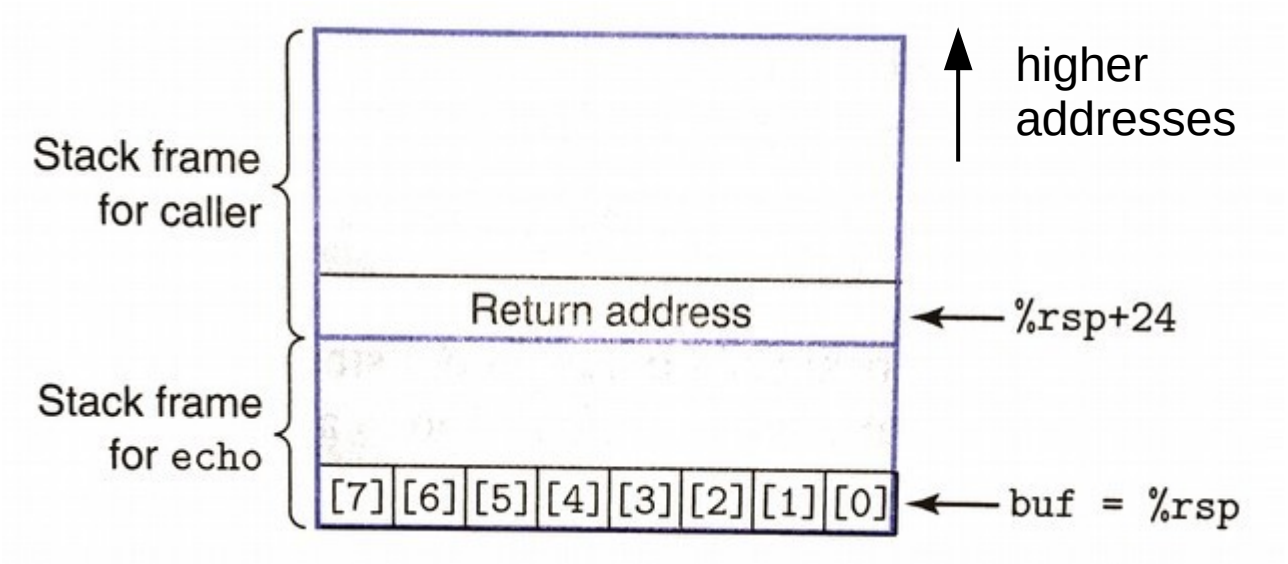

Mitigating buffer overflows

- Stack randomization
  - Randomize starting location of stack
  - Makes it more difficult to guess buffer address
  - In Linux: address-space layout randomization
- Corruption detection
  - Insert a canary (guard value) on stack after each array
  - Check canary before returning from function
- Read-only code regions
  - Mark stack memory as "no-execute"
  - Hinders just-in-time compilation and instrumentation

Exercise

- Trace the following code--what is the value of `%rax` at the end?
  - Initial values: `%rsp = 0x7fffffffe488, %rip = 0x4004e8`

```
4004d6 <leaf>:
  4004d6: 48 8d 7f 0f              leaq   0xf(%rdi),%rdi
  4004da: c3                       retq

4004db <top>:
  4004db: 48 83 ef 05              subq   $0x5,%rdi
  4004df: e8 f2 ff ff ff           callq  4004d6
  4004e4: 48 01 ff                 addq   %rdi,%rdi
  4004e7: c3                       retq

4004e8 <main>:
  4004e8: 48 c7 c7 64 00 00 00     movq   $100,%rdi
  4004ef: e8 e7 ff ff ff           callq  4004db
  4004f4: 48 89 f8                 movq   %rdi,%rax
  4004f7: c3                       retq
```

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004e8
%rsp	0x7fffffffe488
%rdi	???
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	???
0x7fffffffe478	???
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004ef
%rsp	0x7fffffffe488
%rdi	100
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	???
0x7fffffffe478	???
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004db
%rsp	0x7fffffffe480
%rdi	100
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	???
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004df
%rsp	0x7fffffffe480
%rdi	95
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	???
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004d6
%rsp	0x7fffffffe478
%rdi	95
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004da
%rsp	0x7fffffffe478
%rdi	110
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004e4
%rsp	0x7fffffffe480
%rdi	110
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004e7
%rsp	0x7fffffffe480
%rdi	220
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004f4
%rsp	0x7fffffffe488
%rdi	220
%rax	???

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	0x4004f7
%rsp	0x7fffffffe488
%rdi	220
%rax	220

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	???
%rsp	0x7fffffffe490
%rdi	220
%rax	220

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...

Exercise

- Trace the following code--what is the value of `%rax` at the end?

```
4004d6 <leaf>:
  4004d6: leaq   0xf(%rdi),%rdi
  4004da: retq

4004db <top>:
  4004db: subq   $0x5,%rdi
  4004df: callq  4004d6
  4004e4: addq   %rdi,%rdi
  4004e7: retq

4004e8 <main>:
  4004e8: movq   $100,%rdi
  4004ef: callq  4004db
  4004f4: movq   %rdi,%rax
  4004f7: retq
```

%rip	???
%rsp	0x7fffffffe490
%rdi	220
%rax	220

...

0x7fffffffe488	???
0x7fffffffe480	0x4004f4
0x7fffffffe478	0x4004e4
0x7fffffffe470	???

...