

CS 470

Spring 2018

Mike Lam, Professor



مرحبا العالم! Hallo Welt!
Hej Värld! Hello World!
Ciao Mondo
ハローワールド!
¡Holá mundo! 世界您好!
Salut le Monde!

Parallel Languages

Graphics and content taken from the following:

<http://dl.acm.org/citation.cfm?id=2716320>

<http://chapel.cray.com/papers/BriefOverviewChapel.pdf>

<http://arxiv.org/pdf/1411.1607v4.pdf>

<https://en.wikipedia.org/wiki/Cilk>

Parallel languages

- Writing efficient parallel code is hard
- We've covered two generic paradigms ...
 - Shared-memory
 - Distributed message-passing
- ... and three specific technologies (but all in C!)
 - Pthreads
 - OpenMP
 - MPI
- Can we make parallelism easier by changing our language?
 - Similarly: Can we improve programmer *productivity*?

Productivity

- Economic definition: $Productivity = \frac{Output}{Input}$
- What does this mean for parallel programming?
 - How do you measure *input*?
 - How do you measure *output*?

Productivity

- Economic definition: $Productivity = \frac{Output}{Input}$
- What does this mean for parallel programming?
 - How do you measure *input*?
 - Bad idea: size of programming team
 - "The Mythical Man Month" by Frederick Brooks
 - How do you measure *output*?
 - Bad idea: lines of code

Productivity vs. Performance

- General idea: Produce **better** code **faster**
 - **Better** can mean a variety of things: speed, robustness, etc.
 - **Faster** generally means time/personnel investment
- Problem: **productivity** often trades off with **performance**
 - E.g., Python vs. C or Matlab vs. Fortran
 - E.g., garbage collection or thread management

Why?

Complexity


- Core issue: handling **complexity**
- Tradeoff: developer effort vs. system effort
 - Hiding complexity from the developer increases the complexity of the system
 - Higher burden on compiler and runtime systems
 - Implicit features cause unpredictable interactions
 - More **middleware** increases chance of interference and software regressions
 - In distributed systems: locality matters **a lot**

Holy Grail




PGAS

- **Partitioned Global Address Space (PGAS)**
 - Hybrid of distributed message-passing and shared-memory
 - Programmer sees one global address space
 - Each process has its own virtual address space “under the hood”
 - Compiler/runtime must sort out the communication
 - Often using a message-passing library like **MPI** or **GASnet** “under the hood”
 - Issue: Non-Uniform Memory Access (**NUMA**) effects

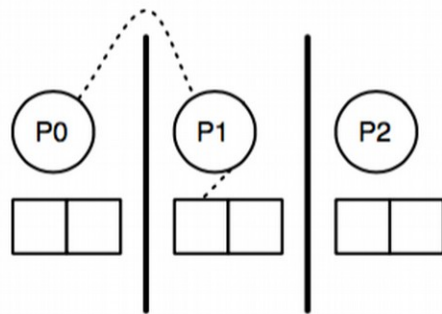

(a) Message-passing




(c) Shared-memory


PGAS

- **Partitioned Global Address Space (PGAS)**


- Hybrid of distributed message-passing and shared-memory
- Programmer sees one global address space
 - Each process has its own virtual address space “under the hood”
- Compiler/runtime must sort out the communication
 - Often using a message-passing library like **MPI** or **GASnet** “under the hood”
- Issue: Non-Uniform Memory Access (**NUMA**) effects

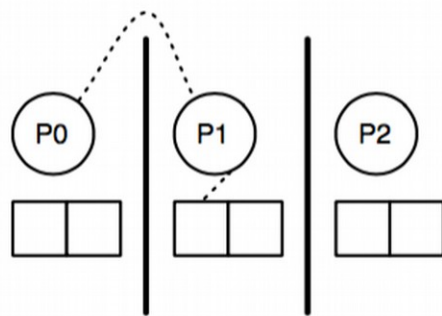

(a) Message-passing

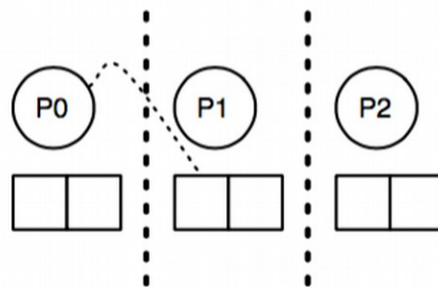

(b) Partitioned-memory
(PGAS)



(c) Shared-memory

Parallel Languages (Mostly PGAS)

- [Erlang](#) [Ericsson, 1986], [Haskell](#) [1990], and [Clojure](#) [2007]
 - Functional languages; most include explicit or implicit parallelism
- [High Performance Fortran](#) (HPF) [1993]
 - Designed by committee
- Academic languages
 - [ZPL](#) [UW, 1994]
 - [Cilk](#) [MIT, 1994] and [Cilk Plus](#) [Intel, 2010]
 - [Titanium](#) [UC Berkeley, 1998]
- [Coarray Fortran](#) (CAF) [1998]
 - Now officially part of the Fortran 2008 standard
- [Unified Parallel C](#) (UPC) [1999]
- HPCS languages [starting 2002]
- [Julia](#) [2012]

High-Performance Fortran

- Motivation: higher abstractions for parallelism
 - Predefined data distributions and parallel loops
 - Optional **directives** for parallelism (similar to OpenMP)
- Development based on Fortran 90
 - Proposed 1991 w/ intense design efforts in early 1990s
 - Wide variety of influences on the design committee
 - Standardized in 1993 and presented at Supercomputing '93

```
1  REAL A(1000,1000), B(1000,1000)
2  !HPF$ DISTRIBUTE A(BLOCK,*)
3  !HPF$ ALIGN B(I,J) WITH A(I,J)
4  DO J = 2, N
5      DO I = 2, N
6          A(I,J)=(A(I,J+1)+2*A(I,J)+A(I,J-1))*0.25 &
7              + (B(I+1,J)+2*B(I,J)+B(I-1,J))*0.25
```

Listing 8: Simple relaxation loop in HPF.

High-Performance Fortran

- Issues
 - Immature compilers and no reference implementation
 - Poor support for non-standard data distributions
 - Poor code performance; difficult to optimize and tune
 - Slow uptake among the HPC community
- Legacy
 - Effort in 1995-1996 to fix problems with HPF 2.0 standard
 - Eventually dropped in popularity and was largely abandoned
 - Some ideas still had a profound influence on later efforts



ZPL ("Z-level Programming Language")

- Array programming language (UW, 1994)
 - All parallelism is implicit
 - Regular data structures with grid alignments
 - Explicit regions and directions

TW = "the world"
NN = "num of neighbors"

```
1  program Life;  
2  config const n : integer  
3  region R = [1..n, 1..n];  
4  direction nw = [-1, -1]; no = [-1, 0]; ne = [-1, 1];  
5           w  = [ 0, -1];          e  = [ 0, 1];  
6           sw = [ 1, -1]; so = [ 1, 0]; se = [ 1, 1];  
7  var TW : [R] boolean;  
8      NN : [R] sbyte;  
9  procedure Life();  
10 begin -- Initialize the world  
11 [R] repeat  
12     NN := TW@^nw + TW@^no + TW@^ne  
13         + TW@^w  + TW@^e  
14         + TW@^sw + TW@^so + TW@^se;  
15     TW := (TW & NN = 2) | (NN = 3)  
16 until !(|<< TW);  
17 end;
```

field of cells

@^ "wrap-at" operator
(shifts array/matrix)

region specifier

Directly influenced the
Chapel language

<< reduction operator
(applied here on boolean OR)

Listing 9: Conway's Game of Life in ZPL.

Cilk and Cilk Plus

- Extension to C language, not PGAS (MIT, 1994)
 - New **spawn** and **sync** keywords for fork-join task parallelism
 - Similar to Pthreads or OpenMP tasks
 - New **cilk_for** construct for parallel loops
 - Similar to OpenMP parallel for loops
 - Acquired by Intel in 2009, deprecated in 2017

```
cilk int fib(int n)
{
    if (n < 2)
        return n;
    else {
        int x, y;
        x = spawn fib(n - 1);
        y = spawn fib(n - 2);
        sync;
        return x + y;
    }
}
```

```
void loop(int *a, int n)
{
    cilk_for (int i = 0; i < n; i++) {
        a[i] = f(a[i]);
    }
}
```

Co-Array Fortran (CAF) [1998]

```
1 INTEGER n
2 ...
3 n = 5
```

(a) Allocate private integer.

```
1 INTEGER n[*]
2 ...
3 n[p] = 5
```

(b) Allocate shared integer
by creating a co-array.

Extension to Fortran

co-array declared with `[*]`

Fig. 7: Both code fragments allocate one integer `n` for each place.

```
1 ! global_sum
2 INTEGER :: x(n)[*] ! array with a co-array
3 INTEGER :: local_temp(n) ! array without a co-array
4 INTEGER :: me, mypartner ! indices of places
5 INTEGER :: n, bit, i, iterations ! other variables
6
7 iterations = log2_images()
8 bit = 1
9 me = this_image(x)
10 DO i = 1, iterations
11   mypartner = xor(me, bit)
12   bit = shiftl(bit, 1)
13   CALL sync_all() ! barrier
14   local_temp(:) = x(:)[mypartner] ! remote memory access
15   CALL sync_all() ! barrier
16   x(:) = x(:) + local_temp(:)
17 ENDDO
```

butterfly reduction pattern

remote memory access

Listing 1: Sum reduction of arrays in CAF.

at end, all values of `x`
are identical

CAF was added to the
Fortran standard in 2008

Unified Parallel C (UPC) [1999]

Extension to C

blocking factor

shared/global arrays (PGAS)

threads only execute iterations
where affinity is local

parallel
for-loop

```
1  shared [N*N/THREADS] uint8_t orig[N][N], edge[N][N];
2  int Sobel() {
3      int i,j,d1,d2;
4      double magnitude;
5      //      init    cond    step    affinity
6      upc_forall(i=1; i<N-1; i++; &edge[i][0]) {
7          for(j=1; j<N-1; j++) {
8              d1 = (int) orig[i-1][j+1] - orig[i-1][j-1];
9              d1 += ((int) orig[i ][j+1] - orig[i ][j-1]) << 1;
10             d1 += (int) orig[i+1][j+1] - orig[i+1][j-1];
11             d2 = (int) orig[i-1][j-1] - orig[i+1][j-1];
12             d2 += ((int) orig[i-1][j ] - orig[i+1][j ]) << 1;
13             d2 += (int) orig[i-1][j+1] - orig[i+1][j+1];
14             magnitude = sqrt(d1*d1+d2*d2);
15             edge[i][j] = magnitude>255 ? 255 : (uint8_t)magnitude;
16         }
17     }
18     if (MYTHREAD == 0) explicit thread ID check
19         printf("DONE\n");
20
21     return 0;
22 }
```

SPMD and remote
data accesses

Listing 3: Parallel edge detection using Sobel operators in UPC.

UPC is still used, with
multiple distributions

DARPA HPCS Program

- High Productivity Computing Systems (**HPCS**)
- Launched in 2002 with five teams (later narrowed to three)
 - Cray, HP, IBM, SGI, Sun
- Language efforts
 - **X10** [IBM, 2004]
 - Based on Java runtime environment
 - **Fortress** [Sun, 2008]
 - Unique idea: "typesetting" code
 - Discontinued in 2012 due to type system complications
 - **Chapel** [Cray, 2009]
 - "Cascade High Productivity Language"

X10

Asynchronous PGAS

```
1  val initializer = (i:Point) => {
2    val r = new Random();
3    var local_result:double = 0.0D;
4    for (c in 1..N) {
5      val x = r.nextDouble();
6      val y = r.nextDouble();
7      if ((x*x + y*y) <= 1.0)
8        local_result++;
9    }
10   local_result
11 };
12 val result_array = DistArray.make[Double](Dist.makeUnique(), initializer);
13 val sum_reducer = (x:Double, y:Double) => { x + y };
14 val pi = 4 * result_array.reduce(sum_reducer, 0.0) / (N * Place.MAX_PLACES);
```

Listing 6: Estimating π using Monte Carlo method in X10.

X10 is still used, but seems
to have lost momentum

Fortress

Hybrid async PGAS and implicit parallelism

```
spawn x.region do
  f(x)
end
```

Computes $f(x)$ wherever x is currently stored

Σ Π

Valid operators

```
1 var a : RR64 = 0.0
2 var b : RR64 = 0.0
3 var c : RR64 = 0.0
4
5 DELTA = b^2 - 4 a c
6 x_1 = (-b - SQRT DELTA)/(2 a)
7 x_2 = (-b + SQRT DELTA)/(2 a)
```

(a) Small example program in Fortress without unicode characters.

```
var a:ℝ64 = 0.0
var b:ℝ64 = 0.0
var c:ℝ64 = 0.0
 $\Delta = b^2 - 4 a c$ 
 $x_1 = \frac{-b - \sqrt{\Delta}}{2 a}$ 
 $x_2 = \frac{-b + \sqrt{\Delta}}{2 a}$ 
```

(b) Small example program in Fortress that supports unicode characters.

Officially discontinued in 2012;
source code is still available

Chapel

- New language designed for parallel computation
 - Heavily influenced by [ZPL](#) and [High-Performance Fortran](#)
- Design is based on user requirements
 - Recent graduates: "a language similar to Python, Matlab, Java, etc."
 - HPC veterans: "a language that gives me complete control"
 - Scientists: "a language that lets me focus on the science"



Chapel

- Chapel stated goals:
 - *"A language that lets scientists **express** what they want ...*
 - *... without taking away the **control** that veterans want ...*
 - *... in a package that's as **attractive** as recent graduates want."*



Chapel themes

- Open source compiler (Apache license)
 - Uses [Pthreads](#) for local concurrency
 - Uses [GASNet](#) library for distributed communication
- Multi-resolution parallelism
 - Multiple levels of abstraction (task and data parallelism)
 - Higher levels build on lower levels
 - Developers can mix-and-match as desired
- Locality control
 - PGAS memory model; developers control data **locales**
- Reduced gap between HPC and mainstream
 - Type inference, generic programming, optional OOP

Chapel examples

```
var done: bool = true;      // 'done' is a boolean variable, initialized to 'true'

proc abs(x: int): int {     // a procedure to compute the absolute value of 'x'
    if (x < 0) then
        return -x;
    else
        return x;
}

var Hist: [-3..3] int,      // a 1D array of integers
    Mat: [0..#n, 0..#n] complex, // a 2D array of complexes
    Tri: [i in 1..n] [1..i] real; // a "triangular" skyline array

var count = 0;              // '0' is an integer, so 'count' is too
const area = 2*r;          // if 'r' is an int/real/complex, 'area' will be too
var len = computeLen();     // 'len' is whatever type computeLen() returns
config const n = 10;        // can be overridden by "--n=X" on the command line

for i in 1..n do            // print 1, 2, 3, ..., n
    writeln(i);

for elem in Mat do          // increment all elements in Mat
    elem += 1;
```

Chapel examples

domain definition

```
1  const BigD = {0..n+1, 0..n+1} dmapped Block(boundingBox=[0..n+1, 0..n+1]),
2      D: subdomain(BigD) = {1..n, 1..n};
3  var A, Temp: [BigD] real;
4
5  do { implicit data parallelism
6      forall (i,j) in D do
7          Temp[i,j] = (A[i-1,j] + A[i+1,j] + A[i,j-1] + A[i,j+1]) / 4; average
8      const delta = max reduce abs(A[D] - Temp[D]); neighbors' values
9      A[D] = Temp[D];
10 } while (delta > epsilon);
```

Listing 4: Jacobi iteration example in Chapel (data parallel).

arbitrary domain array parameter

```
1  proc quickSort(arr: [?D],
2      thresh = log2(here.numCores()), depth = 0,
3      low: int = D.low, high: int = D.high) {
4      if high - low < 8 {
5          bubbleSort(arr, low, high);
6      } else {
7          const pivotVal = findPivot(arr, low, high);
8          const pivotLoc = partition(arr, low, high, pivotVal);
9          serial(depth >= thresh) do cobegin { explicit task parallelism
10              quickSort(arr, thresh, depth+1, low, pivotLoc-1);
11              quickSort(arr, thresh, depth+1, pivotLoc+1, high);
12          } } }
```

Listing 5: Parallel Quicksort example in Chapel (task parallel).

Execution models

- **Fully SPMD**
 - Fixed number of threads spawn at launch and diverge based on thread index checks (similar to MPI)
- **Asynchronous PGAS**
 - Single main thread; worker threads spawn automatically in marked parallel regions (similar to OpenMP)
- **Fully Implicit**
 - Threads spawned dynamically by runtime system as appropriate; no explicit parallel regions

Topologies and data access

- Topologies
 - Flat (indexed)
 - Rectangular / hypercube / torus / mesh
 - Hierarchical
- Access cost function
 - Two-level (local vs. remote)
 - Multi-level
- Data distribution
 - Implicit vs. explicit
 - Regular vs. irregular (domain uniformity)
- Remote data accesses
 - Implicit vs. explicit
 - Local vs. global

PGAS Language Summary

Language	Parallel Execution	Topology	Data Distribution	Distributed Data	Remote Access	Array Indexing
<i>Retrospective PGAS languages</i>						
HPF	Implicit	User defined mesh	Explicit	Regular	Implicit	Global
ZPL	Implicit	User defined mesh	Implicit	Regular	Explicit	Global
GA	SPMD	Flat ordered set	Explicit	Regular	Explicit	Global
<i>Original PGAS languages</i>						
CAF	SPMD	User defined mesh	Implicit	Regular	Explicit	Local
Titanium	SPMD	Flat ordered set	Explicit	Irregular	Expl. + Impl.	not applicable
UPC	SPMD	Flat ordered set	Explicit	Reg. + Irreg.	Implicit	Global
<i>HPCS PGAS languages</i>						
Chapel	APGAS + Impl.	User defined mesh	Explicit	Reg. + Irreg.	Expl. + Impl.	Global
X10	APGAS	Flat ordered set	Explicit	Reg. + Irreg.	Explicit	Global
Fortress	APGAS + Impl.	Hierarchical	Explicit	Reg. + Irreg.	Expl. + Impl.	Global

*lower ≈
newer*

Lessons learned??

For more details and full paper:

<http://dl.acm.org/citation.cfm?id=2716320>

Julia



- New dynamic language for numeric computing
 - Combines ideas from Python, Matlab, R, and Fortran
 - Mantra: *"vectorize when it feels right"*
 - Core is implemented in C/C++, JIT-compiled to native machine code
 - Includes a **REPL**
 - **IJulia** browser-based graphical notebook interface
- Goal: never make the developer resort to using two languages
 - Similar philosophy in Chapel community

```
nheads = @parallel (+) for i=1:1000000000
    int(randbool())
end
```

Simulate coin tosses in parallel

```
function mandelbrot(z)
    c = z
    maxiter = 80
    for n = 1:maxiter
        if abs(z) > 2
            return n-1
        end
        z = z^2 + c
    end
    return maxiter
end
```

Calculate Mandelbrot function

Python for HPC

- Primary strength: writeability
 - Easy-to-learn
 - Low overhead and boilerplate
- Secondary strength: libraries & frameworks
 - [NumPy](#) (supports large, multi-dimensional matrices)
 - [SciPy](#) (scientific computing library that uses NumPy)
 - [SageMath](#) (open source Mathematica/Matlab alternative)
 - [IPython](#) (interactive parallel computing)
 - Many others!



Holy Grail impossible?

Challenge: design your own parallel language!



What would it look like?