


CS354

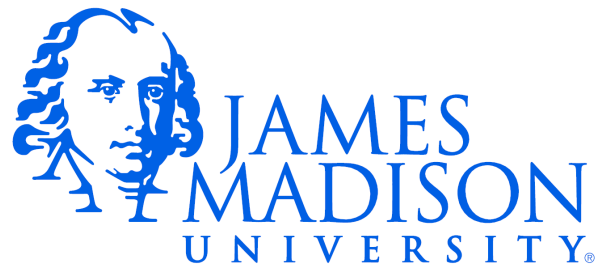

# Investigating ROS Topics

# List all topics, inspect the list for the topic of interest:

```
rostopic list
```

# Get some basic information about the topic of interest:

```
rostopic info your_topic
```

# Investigate the topic's message type:

```
rosmmsg show message_package/MessageType
```

# (If desired) Display messages to the terminal:

```
rostopic echo your_topic
```

# (If desired) Publish a message from the terminal:

```
rostopic pub your_topic message_package/MessageType "message"
```

# Listing Topics

```
$ rostopic list
/camera/depth/camera_info
/camera/depth/image_raw
/camera/depth/points
/camera/parameter_descriptions
...
/mobile_base/events/cliff
...
```

There may be too many topics to conveniently display.  
You can pipe the output to less:

```
$ rostopic list | less
```

# Topic Information

```
$ rostopic info /mobile_base/events/cliff
```

```
Type: kobuki_msgs/CliffEvent
```

```
Publishers:
```

```
* /gazebo (http://cimorene:58845/)
```

```
Subscribers: None
```

# Message Information

```
$ rosmmsg show kobuki_msgs/CliffEvent
uint8 LEFT=0
uint8 CENTER=1
uint8 RIGHT=2
uint8 FLOOR=0
uint8 CLIFF=1
uint8 sensor
uint8 state
uint16 bottom
```

All-caps fields are named constants. Lower-case fields contain data.

# More Message Information

The `-r` or `--raw` flags show the entire message definition, including comments.

```
$ rosmmsg show --raw kobuki_msgs/CliffEvent
# Provides a cliff sensor event.
# This message is generated whenever a particular cliff sensor signals that the
# robot approaches or moves away from a cliff.
# Note that, despite cliff field on SensorState messages, state field is not a
# bitmask, but the new state of a single sensor.

# cliff sensor
uint8 LEFT    = 0
uint8 CENTER = 1
uint8 RIGHT   = 2

# cliff sensor state
uint8 FLOOR = 0
uint8 CLIFF = 1

uint8 sensor
uint8 state

# distance to floor when cliff was detected
uint16 bottom
```

# Listening in on a Topic

```
$ rostopic echo /mobile_base/events/cliff
sensor: 0
state: 1
bottom: 42647
---
sensor: 2
state: 1
bottom: 42647
---
sensor: 1
state: 1
bottom: 42647
---
```

Again, the output can be piped to `less`.

# Publishing to a Topic

```
$ rostopic pub /mobile_base/events/cliff kobuki_msgs/CliffEvent "sensor: 0  
state: 0  
bottom: 0"
```

publishing and latching message. Press ctrl-C to terminate

This is an odd example.

Really, only the robot should publish to this topic, but ROS won't stop us.



# rqt

- Most of the tasks above can be accomplished through the rqt GUI, but it is clunky.

Rviz

---